


Mars Series

450W/455W/460W

SUN 60M-H8

MBB HALF-CELL MONO PV MODULE
182MM CELLS

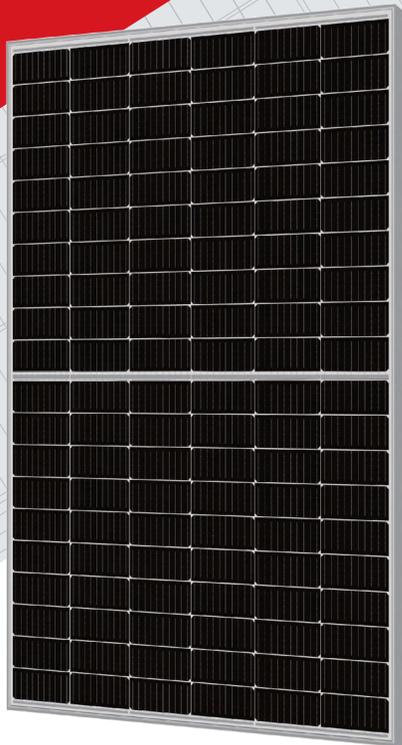

COMPREHENSIVE CERTIFICATES

IEC61215 / IEC61730 / IEC61701 / IEC62716 / IEC62804
ISO 9001: 2015 Quality management systems;
ISO 14001: 2015 Environmental management systems;
OHSAS 18001: 2007 Occupational health and safety management systems;

Sunergy Advantages



Power attenuation rate surpass than industry standards
As the CTC randomization test, our attenuation rate is 1.81%, 0.31% and 0.34% in the 1st, 2nd and 3rd year, which is much less than the national standard value of 2% and 0.55%.



Overflow tank can be waterproof

The excess silicone will flow into the overflow tank, can reduce 3% water vapor entering the panels.



Stronger frame

The C side of the frame contains curved hook reinforcement, enhanced the mechanical load strength by 10%.



Current grading

Current classification effectively avoids 2% power loss caused by current mismatch during installation, achieving max output power.



IP68 junction box

IP68 junction box offer perfect waterproof performance.

SUNERGY USA WORKS LLC


Founded in 2008, Sunergy is a manufacturer of high-performance photovoltaic products. With 12 manufacturing bases and more than 20 branches around the world, the company's business covers modules, photovoltaic power stations and EPC. Sunergy products are available in over 120 countries and regions and are used extensively in ground-mounted power plants, commercial & industrial rooftop PV systems and residential rooftop PV systems.

QUALIFICATIONS AND CERTIFICATES



LINEAR PERFORMANCE WARRANTY

- 12 Years Manufacturing Warranty
- 12 Years 92.0% Power Output
- 25 Years 84.8% Power Output

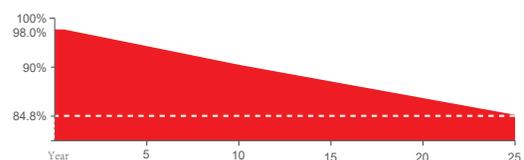


SUNERGY USA WORKS LLC
www.sunergyworks.com




Mars Series SUN 60M-H8


MECHANICAL DRAWINGS

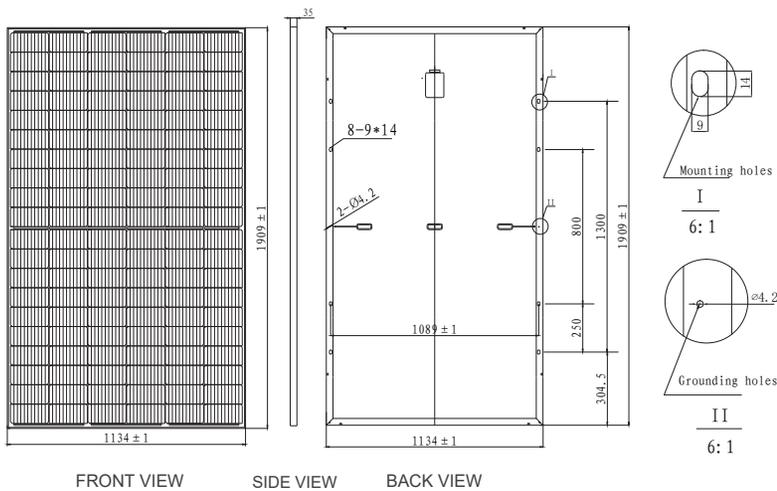

I-V CURVES

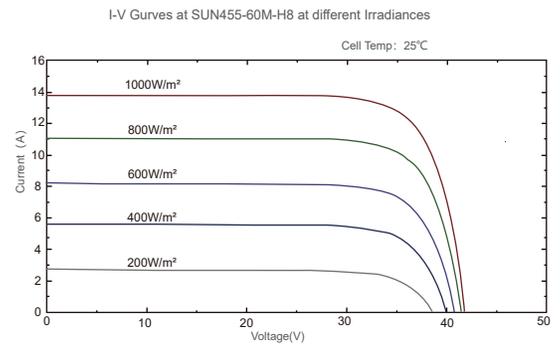

Power voltage current curve at different temperature

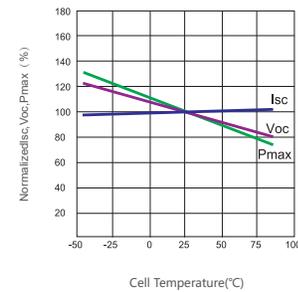

MECHANICAL SPECIFICATION

Cell Type	Mono Crystalline 182x91mm
Number Of Cells	120 (6x20)
Dimensions(AxBxC)	1909x1134x35mm
Weights	24.5kg
Glass	3.2mm Tempered Low Iron Glass
Aluminium Frame	Anodised Aluminium
Junction Box	Split Junction Box (IP68 ,three diode)
Connector	Mc4 Compatible
Output Cables	4.0mm²,+300mm,-300mm Customized Length

PACKING CONFIGURATION

Container	40' HQ
Pieces Per Pallet	31
Pallets Per Container	24
Pieces Per Container	744

ELECTRICAL CHARACTERISTICS

Module Type	450W		455W		460W	
	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power At STC(Pmax)	450W	339.0W	455W	342.8W	460W	346.5W
Short Circuit Current(Isc)	13.70A	11.07A	13.77A	11.13A	13.85A	11.19A
Open Circuit Voltage(Voc)	41.6V	38.9V	41.8V	39.1V	42.0V	39.3V
Maximum Power Current(Imp)	12.86A	10.49A	12.93A	10.55A	13.00A	10.61A
Maximum Power Voltage(Vmpp)	35.0V	32.3V	35.2V	32.5V	35.4V	32.7V
Module Efficiency	20.79%		21.02%		21.25%	
Power Tolerance	0~+5W		0~+5W		0~+5W	
Maximum System Voltage	VDC 1500V					
Maximum Series Fuse	25A					
Increased Snowload Acc.to Iec 61215	5400Pa					
Operating Temperature	-40~+85°C					
Number Of Bypass Diodes	3					
Norminal Operating Cell Temperature(Noct)	45°C±2°C					
Temperature Coefficient Of Pmax	-0.35%/°C					
Temperature Coefficient Of Voc	-0.27%/°C					
Temperature Coefficient Of Isc	0.05%/°C					

STC: 1000W/m2 irradiance, 25°C cell temperature, AM1.5. NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, wind speed 1m/s.



SUNERGY USA WORKS LLC
www.sunergyworks.com

